


centre-tab pull plugs P SERIES



This tapered plug features a well-engineered centre-pull tab that extends above the flange area, making it easy to grasp and remove from a variety of threaded and non-threaded ports. Ideal for fittings with internal o-rings. Centre-pull tab will not break off during removal.

When used as a PLUG: "B" dimension should be at least .020" more than diameter to be plugged. Larger diameters may require more interference.

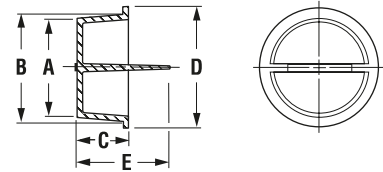

Specifications

- Material: Low-Density Polyethylene
- Colour: Orange

Part Number	To Plug Thread Sizes			Dimensions										Standard Package	
	NPT/ BSP	Standard	Metric	A		B		C		D		E		Pieces	Lbs.
				in	mm	in	mm	in	mm	in	mm	in	mm		
235-V-P	-	5/16-24	M7	.209	5.31	.269	6.83	.34	8.64	.38	9.65	.59	14.99	10000	5
236-X-P	-	-	M8/M8x1	.239	6.07	.303	7.70	.38	9.65	.47	11.94	.62	15.75	15000	10
236-L-P	-	-	-	.267	6.78	.335	8.51	.41	10.41	.47	11.94	.78	19.81	10000	8
237-Y-P	-	3/8-24	M10/M10x1.25	.299	7.59	.367	9.32	.38	9.65	.50	12.70	.78	19.81	20000	17
229-Z-P	1/8	-	-	.331	8.41	.397	10.08	.38	9.65	.56	14.22	.75	19.05	20000	19
229-S-P	1/8	-	-	.335	8.51	.375	9.53	.22	5.59	.47	11.94	.34	8.64	20000	15
238-D-P	-	7/16-20	M12	.362	9.19	.428	10.87	.38	9.65	.56	14.22	.75	19.05	25000	25
239-E-P	-	-	M12x1.25	.392	9.96	.459	11.66	.41	10.41	.59	14.99	.75	19.05	15000	17
181-P	1/4	1/2-20	M14	.422	10.72	.486	12.34	.41	10.41	.62	15.75	.78	19.81	15000	18
240-P	-	-	M14x1.5	.448	11.38	.512	13.00	.41	10.41	.66	16.76	.53	13.46	7500	8
189-P	-	9/16-18	-	.472	11.99	.548	13.92	.47	11.94	.69	17.27	.81	20.57	10000	16
189-2-P	-	-	M16	.500	12.70	.568	14.43	.47	11.94	.72	18.29	.81	20.57	10000	17
241-P	-	5/8-18	-	.533	13.54	.608	15.44	.47	11.94	.75	19.05	.72	18.29	10000	17
188-P	3/8	-	M18	.551	14.00	.633	16.08	.50	12.70	.78	19.81	.75	19.05	7500	15
188-SP	3/8	-	M18	.580	14.73	.625	15.88	.22	5.59	.78	19.81	.34	8.64	15000	13
242-P	-	-	M18x1.5	.580	14.73	.668	16.97	.53	13.46	.84	21.34	.75	19.05	7000	15
242-2-P	-	-	-	.610	15.49	.695	17.65	.53	13.46	.84	21.34	.78	19.81	5000	12
243-P	-	3/4-16	M20	.640	16.26	.727	18.47	.50	12.70	.88	22.35	.75	19.05	5000	11
191-P	-	-	M20x1.5	.678	17.22	.755	19.18	.53	13.46	.88	22.35	.78	19.81	5000	13
203-P	1/2	-	M22	.691	17.55	.787	19.99	.59	14.99	.94	23.88	.75	19.05	5000	14
203-SP	1/2	-	M22	.725	18.42	.770	19.56	.22	5.59	.86	21.84	.34	8.64	10000	13
245-P	-	-	M22x1.5	.727	18.47	.825	20.96	.59	14.99	1.00	25.40	.84	21.34	5000	16
246-P	-	7/8-14	M24	.752	19.10	.849	21.56	.59	14.99	1.00	25.40	.75	19.05	5000	15
204-P	-	-	M24x2	.803	20.40	.912	23.16	.66	16.76	1.06	26.92	.91	23.11	2500	10
192-1-P	3/4	-	M27	.869	22.07	.973	24.71	.75	19.05	1.12	28.45	1.00	25.40	2500	12
192-2-P	3/4	-	M27	.869	22.07	.973	24.71	.66	16.76	1.12	28.45	.88	22.35	2500	10
248-P	-	1-1/16-12	M27x2	.915	23.24	1.040	26.42	.72	18.29	1.16	29.46	.91	23.11	2500	12
249-P	-	-	M30	.967	24.56	1.092	27.74	.78	19.81	1.25	31.75	1.03	26.16	1500	9
153-P	-	-	M30x2	1.026	26.06	1.146	29.11	.75	19.05	1.34	34.04	1.00	25.40	1500	9
193-P	1	-	M33	1.093	27.76	1.219	30.96	.78	19.81	1.41	35.81	1.00	25.40	1500	10
193-SP	1	-	M33	1.100	27.94	1.210	30.73	.50	12.70	1.34	34.04	.62	15.75	2500	12
250-P	-	1-5/16-12	M33x2/M36	1.179	29.95	1.286	32.66	.75	19.05	1.44	36.58	1.00	25.40	1500	11
205-P	-	-	-	1.235	31.37	1.360	34.54	.75	19.05	1.53	38.86	1.00	25.40	1000	9
252-P	-	-	-	1.292	32.82	1.356	34.44	.78	19.81	1.50	38.10	1.00	25.40	1500	12
253-P	-	-	M39/M39x3	1.312	33.32	1.465	37.21	.75	19.05	1.62	41.15	1.00	25.40	1000	8
253-1-P	-	-	-	1.344	34.14	1.527	38.79	.88	22.35	1.75	44.45	1.00	25.40	1000	11
381-P	-	-	-	1.360	34.54	1.420	36.07	.53	13.46	1.72	43.69	.66	16.76	1500	10
254-P	1 1/4	-	-	1.451	36.86	1.601	40.67	.75	19.05	1.75	44.45	1.00	25.40	1000	10
255-P	-	-	-	1.633	41.48	1.750	44.45	.78	19.81	1.94	49.28	1.11	28.19	1000	12
273-1-P	-	-	-	1.735	44.07	1.784	45.31	.50	12.70	1.31	33.27	.75	19.05	1000	12
206-P	-	-	-	1.807	45.90	1.938	49.23	1.00	25.40	2.16	54.86	1.25	31.75	500	8
197-P	1-1/2	-	-	1.820	46.23	1.835	46.61	.50	12.70	2.03	51.56	.75	19.05	1000	10
260-P	-	2-1/4-12	-	2.067	52.50	2.243	56.97	1.03	26.16	2.44	61.98	1.25	31.75	350	6
198-P	2	-	-	2.232	56.69	2.262	57.45	.50	12.70	2.53	64.26	.75	19.05	1000	13
207-P	-	2-1/2-12	-	2.300	58.42	2.464	62.59	1.00	25.40	2.66	67.56	1.25	31.75	250	5
199-P	2-1/2	-	-	2.698	68.53	2.866	72.80	.50	12.70	2.97	75.44	.75	19.05	500	10
268-P	-	-	-	2.850	72.39	2.982	75.74	.75	19.05	3.28	83.31	1.00	25.40	250	6
200-P	3	-	-	3.320	84.33	3.452	87.68	.75	19.05	3.62	91.95	1.00	25.40	250	8