


threaded (un/uns) cap DC SERIES

Originally engineered for use in aircraft and hydraulic equipment applications. Seals out contaminants while protecting threads. Rolled threads allow cap to be either pushed or threaded on. Special threads meet UN and UNS specifications.

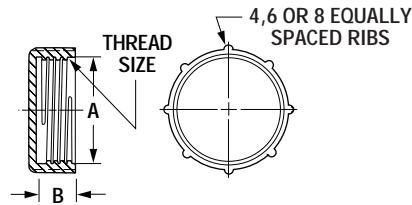

Specifications

• Material: High-Density Polyethylene • Colour: Blue • Applicable Spec: MIL-8779-ANSI B1.1

Part Number	To Cap Thread Size	Tubing Size	Dimensions				Standard Package	
			in	A mm	in	B mm	Pieces	Lbs.
DC 3	3/8-28	3/16	.375	9.53	5.08	.20	10000	8
DC 4	7/16-24	1/4	.438	11.13	6.10	.24	10000	10
DC 5	1/2-24	5/16	.500	12.70	6.10	.24	10000	12
DC 6	9/16-20	3/8	.562	14.27	6.60	.26	6500	11
DC 8	23/32-20	1/2	.719	18.26	6.86	.27	7500	18
DC 10	27/32-18	5/8	.844	21.44	8.64	.34	5000	16
DC 12	1-16	3/4	1.000	25.40	9.65	.38	3500	15
DC 14	1-1/8-16	7/8	1.125	28.58	10.16	.40	3000	17
DC 16	1-1/4-14	1	1.250	31.75	10.92	.43	2000	12
DC 20	1-33/64-1	1-1/4	1.516	38.51	10.92	.43	1500	14
DC 21S	1-37/64-14	1-1/4	1.578	40.08	10.92	.43	1500	14
DC 24	1-25/32-14	1-1/2	1.782	45.26	12.70	.50	1000	12
DC 25S	1-27/32-14	1-1/2	1.844	46.84	12.70	.50	1000	13