


electrical connector plugs **MS SERIES**

Designed to protect electrical connectors from dust, damage and moisture. Flanged end makes for easy removal from hard-to-reach areas.

Specifications

- Material: Low-Density Polyethylene
- Optional Material: Static Dissipative (Pink) or Conductive (Black). See www.capsnplugs.com
- Colour: Yellow • Applicable Spec: **MS-90376**

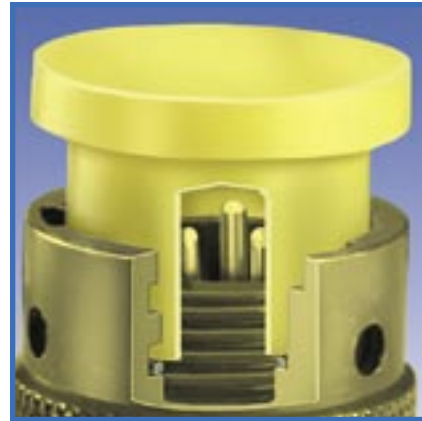

non-threaded plugs

Part Number	Dash No.	Dimensions								Standard Package	
		A		B		C		D		Pieces	Lbs.
		in	mm	in	mm	in	mm	in	mm		
MS 8Y	-8Y	.483	12.27	.413	10.49	.62	15.75	.67	17.02	10000	20
MS 10Y	-10Y	.595	15.11	.530	13.46	.62	15.75	.75	19.05	7000	17
MS 12Y	-12Y	.715	18.16	.655	16.64	.62	15.75	.86	21.84	5000	14
MS 14Y	-14Y	.845	21.46	.785	19.94	.62	15.75	1.03	26.16	4500	18
MS 16Y	-16Y	.963	24.46	.893	22.68	.62	15.75	1.12	28.45	3500	16
MS 18Y	-18Y	1.088	27.64	1.028	26.11	.62	15.75	1.25	31.75	3000	16
MS 20Y	-20Y	1.215	30.86	1.150	29.21	.62	15.75	1.40	35.56	2500	17
MS 22Y	-22Y	1.340	34.04	1.270	32.26	.62	15.75	1.50	38.10	2000	15
MS 24Y	-24Y	1.460	37.08	1.390	35.31	.62	15.75	1.64	41.66	1500	14
MS 25Y	-25Y	1.580	40.13	1.540	39.12	.62	15.75	1.81	45.97	1500	14
MS 28Y	-28Y	1.718	43.64	1.648	41.86	.62	15.75	1.88	47.75	1000	11
MS 32Y	-32Y	1.970	50.04	1.890	48.01	.62	15.75	2.12	53.85	500	7
MS 36Y	-36Y	2.210	56.13	2.140	54.36	.62	15.75	2.34	59.44	500	7
MS 40Y	-40Y	2.450	62.23	2.380	60.45	.62	15.75	2.60	66.04	500	9
MS 44Y	-44Y	2.700	68.58	2.630	66.80	.62	15.75	2.88	73.15	500	10
MS 48Y	-48Y	2.950	74.93	2.880	73.15	.62	15.75	3.12	79.25	500	11

