


## push-on (straight-thread) caps *PO SERIES*

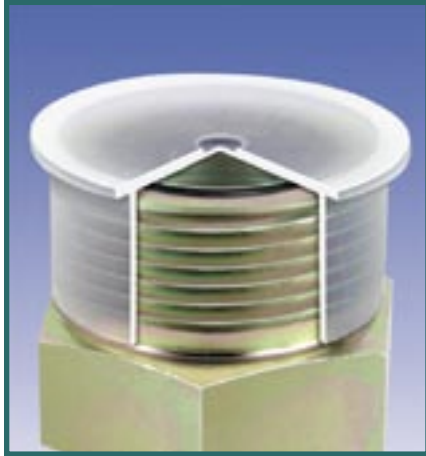

Unlike tear-tab closures that can only be used once, the PO Series can be removed repeatedly without jeopardizing protection. Specifically designed to protect straight threads with and without o-rings, this unique design also lends itself to protecting various thread forms and non-threaded fittings.

### Specifications

- *Material: Low-Density Polyethylene*
- *Colour: Natural*

Part Number	To Cap Thread Size	Dimensions						Standard Package	
		A		B		C		Pieces	Lbs.
		in	mm	in	mm	in	mm		
PO 20	7/16	.428	10.87	.50	12.70	.69	17.53	10000	14
PO 30	1/2	.490	12.45	.50	12.70	.75	19.05	7000	12
PO 40	9/16	.550	13.97	.53	13.46	.81	20.57	7500	14
PO 50	11/16	.676	17.17	.53	13.46	.94	23.88	5000	12
PO 55	–	.721	19.84	.70	17.78	1.00	25.40	3500	12
PO 60	3/4	.738	20.04	.70	17.78	1.00	25.40	3500	12
PO 70	13/16	.802	20.37	.59	14.99	1.06	26.92	3500	11
PO 80	7/8	.864	21.95	.69	17.53	1.12	28.45	2500	9
PO 90	1	.990	25.15	.69	17.53	1.25	31.75	3000	14
PO 100	1-1/16	1.051	26.70	.78	19.81	1.31	33.27	2250	12
PO 110	1-3/16	1.175	29.85	.78	19.81	1.44	36.58	2000	12
PO 120	1-5/16	1.298	32.97	.78	19.81	1.56	39.62	1500	10
PO 130	1-7/16	1.426	36.22	.78	19.81	1.69	42.93	1000	8
PO 140	1-5/8	1.612	40.94	.88	22.35	1.88	47.75	1000	10
PO 150	1-11/16	1.674	42.52	.88	22.35	1.94	49.28	800	9
PO 160	1-7/8	1.861	47.27	1.00	25.40	2.12	53.85	500	7

