


threaded (nf and un) plugs **TF SERIES**

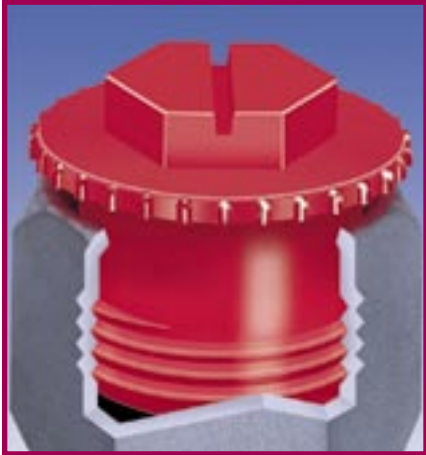

General purpose threaded plug that can be utilized for a variety of different applications. Series can be tightened by hand, hex wrench or screwdriver. Will meet low-pressure testing requirements.

Specifications

- Material: Polypropylene
- Colour: Red
- Thread Locations Will Vary
– Sampling Recommended

Part Number	To Plug Thread Size	Dimensions								Standard Package	
		A		B		C		D		Pieces	Lbs.
		in	mm	in	mm	in	mm	in	mm		
TF 7-1	7/16-20	.30	7.62	.68	17.27	.19	4.83	.44	11.18	5000	12
TF 8	1/2-20	.36	9.14	.74	18.80	.19	4.83	.50	12.70	4500	12
TF 9	9/16-18	.35	8.89	.81	20.57	.19	4.83	.50	12.70	3500	11
TF 10	5/8-18	.34	8.64	.74	18.80	.17	4.32	.56	14.22	7500	25
TF 12	3/4-16	.44	11.18	.89	22.61	.18	4.57	.68	17.27	5000	25
TF 12-2	3/4-16	.44	11.18	1.03	26.16	.19	4.83	.69	17.53	5000	28
TF 14	7/8-14	.50	12.70	1.02	25.91	.24	6.10	.75	19.05	2500	17
TF 17-2	1-1/16-12	.62	15.75	1.47	37.34	.19	4.83	.88	22.35	1500	17
TF 21-1	1-5/16-12	.88	22.35	1.56	39.62	.25	6.35	.88	22.35	1000	19
TF 26	1-5/8-12	1.00	25.40	2.00	50.80	.25	6.35	1.00	25.40	1000	19
TF 30	1-7/8-12	1.00	25.40	2.25	57.15	.25	6.35	1.25	31.75	500	17

Available with or without o-ring. Call Caps'n Plugs for details.

