


threaded (npt) plugs *TP-F SERIES • SQUARE HEAD WITH FLANGE*

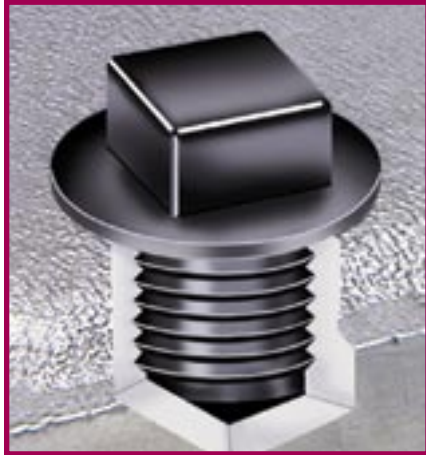

Flange design allows plug to protect circumference of port while protecting threads from contaminants and moisture. Commonly used during low-pressure testing and in-plant processing. Combats oil and heat up to 250°F. Not for permanent applications.

Specifications

- Material: High-Density Polyethylene
- Colour: Black
- Applicable Spec: **MIL-C-5501J5**

Part Number	To Plug NPT Thread Size	Dimensions								Standard Package	
		A		B		C		D		Pieces	Lbs.
		in	mm	in	mm	in	mm	in	mm		
* TP 1F	1/8	.29	7.37	.43	10.92	.19	4.83	.56	14.22	7500	16
TP 3F	1/4	.35	8.99	.44	11.18	.25	6.35	.69	17.53	5000	16
TP 5F	3/8	.41	10.41	.44	11.18	.25	6.35	.81	20.57	2500	11
TP 7F	1/2	.47	11.94	.56	14.22	.25	6.35	1.00	25.40	1500	11
TP 9F	3/4	.52	13.21	.63	16.00	.25	6.35	1.25	31.75	2000	20

* Hexagonal head

