


threaded (metric) sealing plugs *MT SERIES*



Designed to protect metric fittings. Plug is engineered with five complete threads to provide an absolute tight fit. The “sealing lip” enables each plug to provide a perfect seal. The MT Series can be applied or removed with a screwdriver, socket wrench, power tool or by hand. Will withstand pressure up to 10 psi and intermittent temperatures up to 170°C or approximately 300°F.

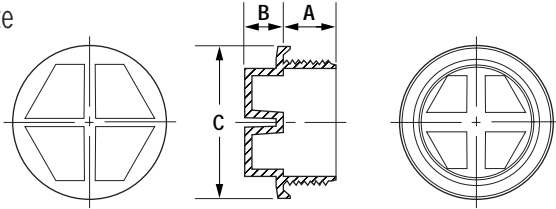

Specifications

- Material: Nylon 6
- Colour: Yellow

| Part Number | To Plug Thread Size | Dimensions | | | | | | Standard Package | |
|-------------|---------------------|------------|-------|-----|-------|------|-------|------------------|------|
| | | A | | B | | C | | Pieces | Lbs. |
| | | in | mm | in | mm | in | mm | | |
| MT 10 | M 10 X 1 | .28 | 7.11 | .39 | 9.91 | .56 | 14.22 | 10000 | – |
| MT 12 | M12 X 1.5 | .56 | 14.22 | .56 | 14.22 | .68 | 17.27 | 8000 | 37 |
| MT 14 | M14 X 1.5 | .56 | 14.22 | .56 | 14.22 | .76 | 19.30 | 7000 | – |
| MT 16 | M16 X 1.5 | .56 | 14.22 | .56 | 14.22 | .87 | 22.10 | 4500 | – |
| MT 18 | M18 X 1.5 | .56 | 14.22 | .44 | 11.18 | .94 | 23.88 | 4000 | – |
| MT 20 | M20 X 1.5 | .56 | 14.22 | .55 | 13.97 | 1.02 | 25.91 | 2800 | 32 |
| MT 22 | M22 X 1.5 | .56 | 14.22 | .55 | 13.97 | 1.07 | 27.18 | 2700 | – |
| MT 26 | M26 X 1.5 | .56 | 14.22 | .55 | 13.97 | 1.26 | 32.00 | 1700 | – |
| MT 27 | M27 X 2 | .51 | 12.95 | .55 | 13.97 | 1.27 | 32.26 | 1500 | – |
| MT 33 | M33 X 2 | .51 | 12.95 | .55 | 13.97 | 1.59 | 40.39 | 900 | – |

NOTE: If carton information is not available, call Caps'n Plugs