


## flareless tube and nut assembly plugs **PDE SERIES**

Knurled for ease of application, Series PDE Plugs are designed to fit MS-21921 tube and nut assemblies interchangeably. They can be installed with light finger tightening to seal beyond normal requirements.

### Specifications

- Material: Low-Density Polyethylene
- Colour: Red




Part Number	To Fit Thread Size Inches	Dimensions				Packaging	
		B		C		Carton Quantity	Mini Pak Quantity
		in	mm	in	mm		
PDE-3	3/16-24	.35	8.89	.56	14.22	5000	1000
PDE-4	7/16-20	.40	10.16	.56	14.22	5000	1000
PDE-5	1/2-20	.46	11.68	.63	16.00	5000	1000
PDE-6	9/16-18	.48	12.19	.68	17.27	5000	1000
PDE-8	3/4-16	.54	13.72	.87	22.10	5000	1000
PDE-10	7/8-14	.62	15.75	1.00	25.40	2500	500
PDE-12	1-1/16-12	.64	16.26	1.25	31.75	1000	200
PDE-16	1-5/16-12	.72	18.29	1.50	38.10	1000	200

## SAE o-ring port plugs **PDO SERIES**

Series PDO Plugs provide positive sealing for SAE-straight-threaded O-ring type ports and MIL-MS-33649 bosses on fluid power components. Integral O-ring type bead seals in the bevel of the port to prevent oil leakage or entrance of contaminants. Seal at outside of knurl protects port face against paint and dirt.

### Specifications

- Material: High-Density Polyethylene
- Colour: Red

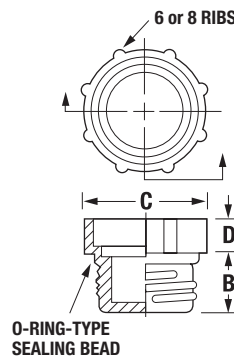

Part Number	To Fit Thread Size Inches	Dimensions						Packaging	
		B		C		D		Carton Quantity	Mini Pak Quantity
		in	mm	in	mm	in	mm		
PDO-104	7/16-20	.32	8.13	.65	16.51	.38	9.65	5000	1000
PDO-105	1/2-20	.32	8.13	.72	18.29	.38	9.65	5000	1000
PDO-106	9/16-18	.36	9.14	.78	19.81	.38	9.65	5000	1000
PDO-108	3/4-16	.40	10.16	.98	24.89	.38	9.65	2500	500
PDO-110	7/8-14	.45	11.43	1.11	28.20	.38	9.65	2500	500
PDO-112	1-1/16-12	.62	15.75	1.31	33.27	.38	9.65	2500	500
PDO-116	1-5/16-12	.62	15.75	1.56	39.63	.38	9.65	1000	200
PDO-120	1-5/8-12	.62	15.75	1.88	47.75	.38	9.65	1000	200